

395mm X 190mm INSTALLED 150mm FROM TOP OF
SEAT AS PER A.S 1428.1 - 2009 SECTION 15.2.4

ALL DISABLE TOILETS TO HAVE A FOLD DOWN SEAT TO ALL SHOWERS 1000mm X 400mm. SEAT TO BE 40mm FROM BRICKWORK AND TO BE INSTALLED AS PER A.S 1428.1 - 2009 15.5.9

THE CROSS SECTION OF HANDRAILS SHALL BE CIRCULAR, NOT LESS THAN 30mm NO MORE THAN 50mm DIA.

THE HOT WATER SYSTEM INSTALLED ABOVE THE
CEILING FIXED TO BRICKWORK / PANEL

THE EXHAUST FAN WILL BE INSTALLED IN A LOCATION THAT WILL ALLOW ACCESS FOR THE

WGC NOTES

PLUMBER TO ALLOW FOR FIXING FOR TOILET
SYSTEM , BASINS AND TOILET ROLL HOLDER
(TYP)

LIGHT POINTS AND EXHAUST FANS TO WET AREA
AS SHOWN. DOUBLE GPO TO BE INSTALLED
ABOVE SINK AREA (TYP)

DISABLED HANDRAILS TO COMPLY WITH AS 1428.1
(TYP)




WC SEAT TO HAVE A MINIMUM LUMINANCE OF
30 % FROM THE FLOOR
FINISH COLOUR

BRaille SIGNAGE MUST BE LOCATED NOT LESS THAN 1200mm AND NOT HIGHER THAT 1600mm FROM F.F.L. 50mm FROM EDGE OF DOOR


ALL LIGHT SWITCHES TO BE INSTALLED NO HIGHER THAN 1m FROM THE F.F.L

ALL DOORS TO HAVE A MINIMUM LUMINANCE OF
30 % FROM THE ADJONING WALLS



DISABLE TOILET TO HAVE INSTALLED A CLOTHES-HANGING DEVICE / HOOK AS PER THE AUSTRALIAN STANDARDS. HOOK TO BE INSTALLED 1200mm TO 1350mm ABOVE THE F.F.L AND NOT LESS THEN 500mm OUT FROM ANY INTERNAL CORNER

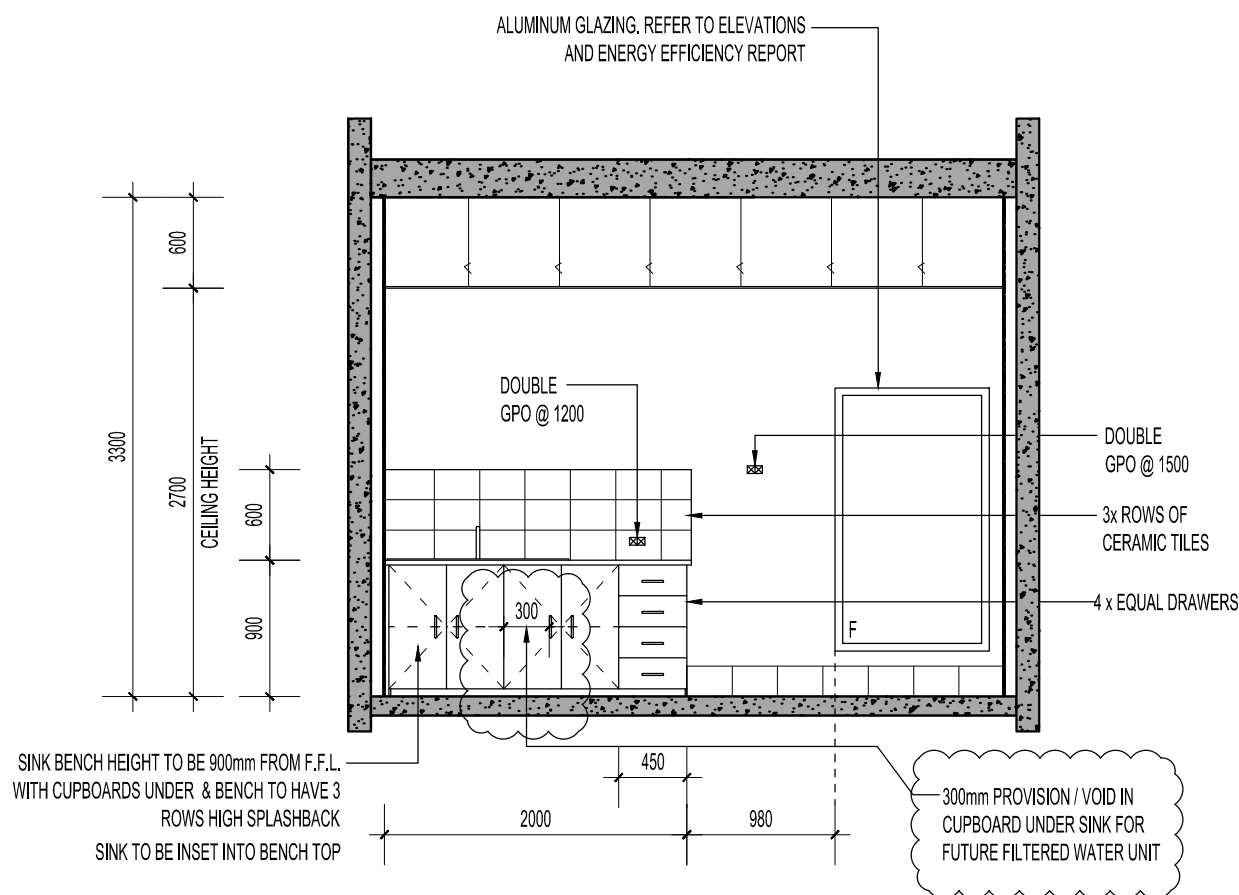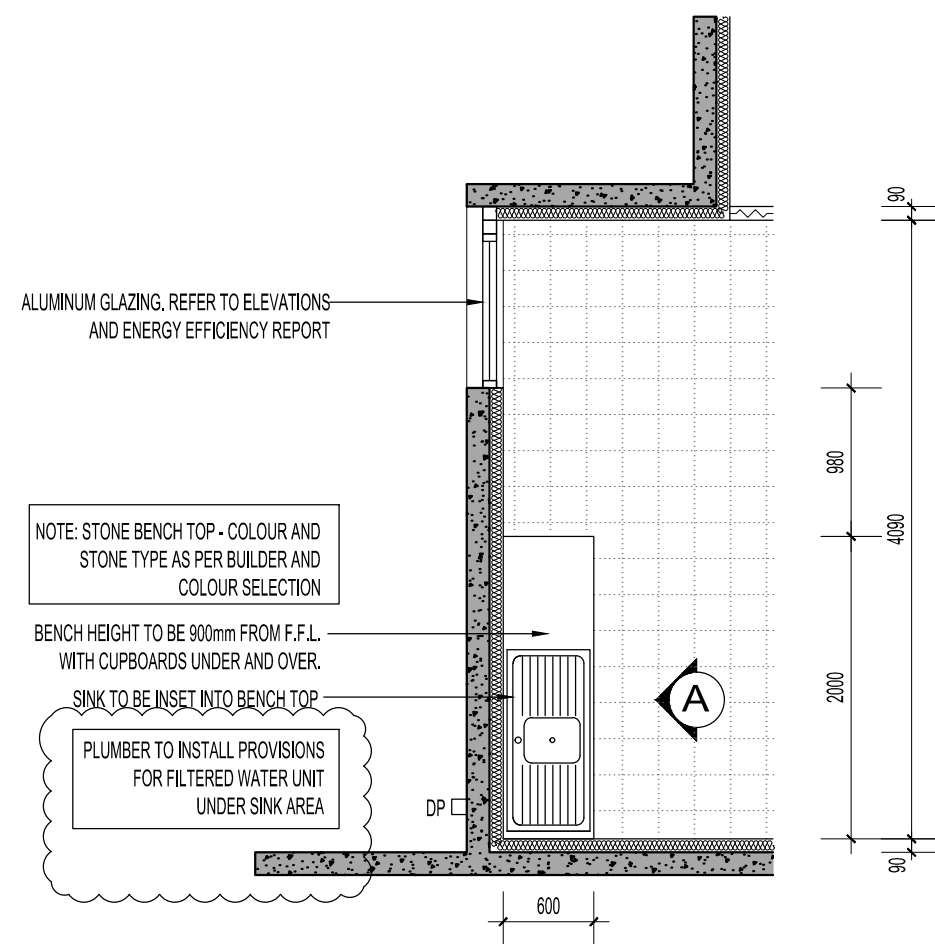


ELEVATION A - KITCHEN

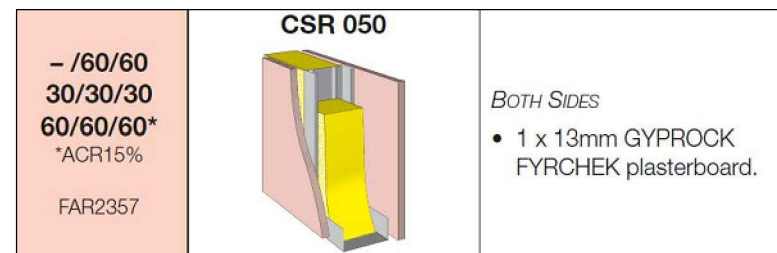


AM2
A102

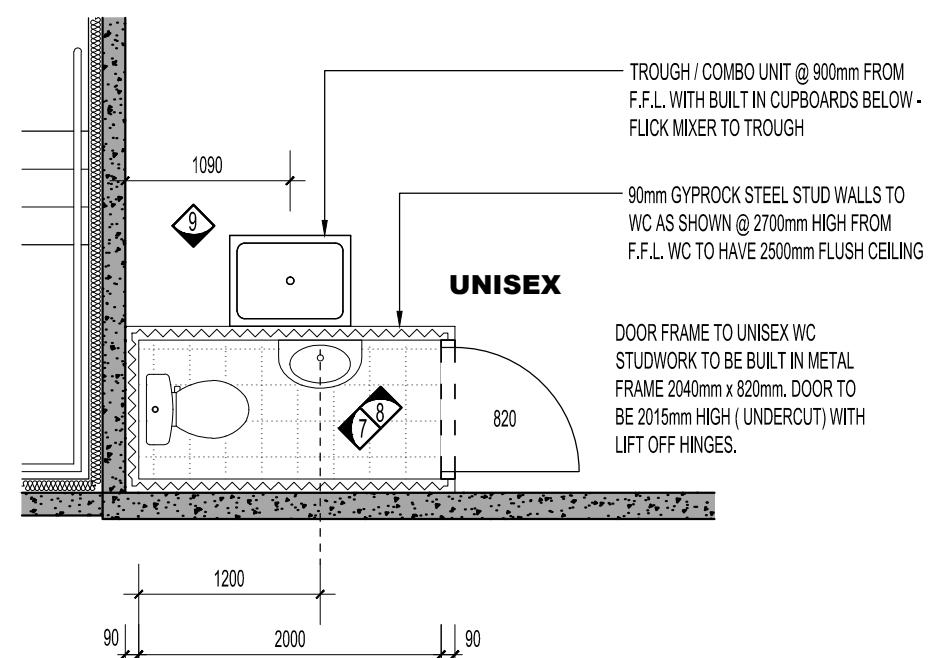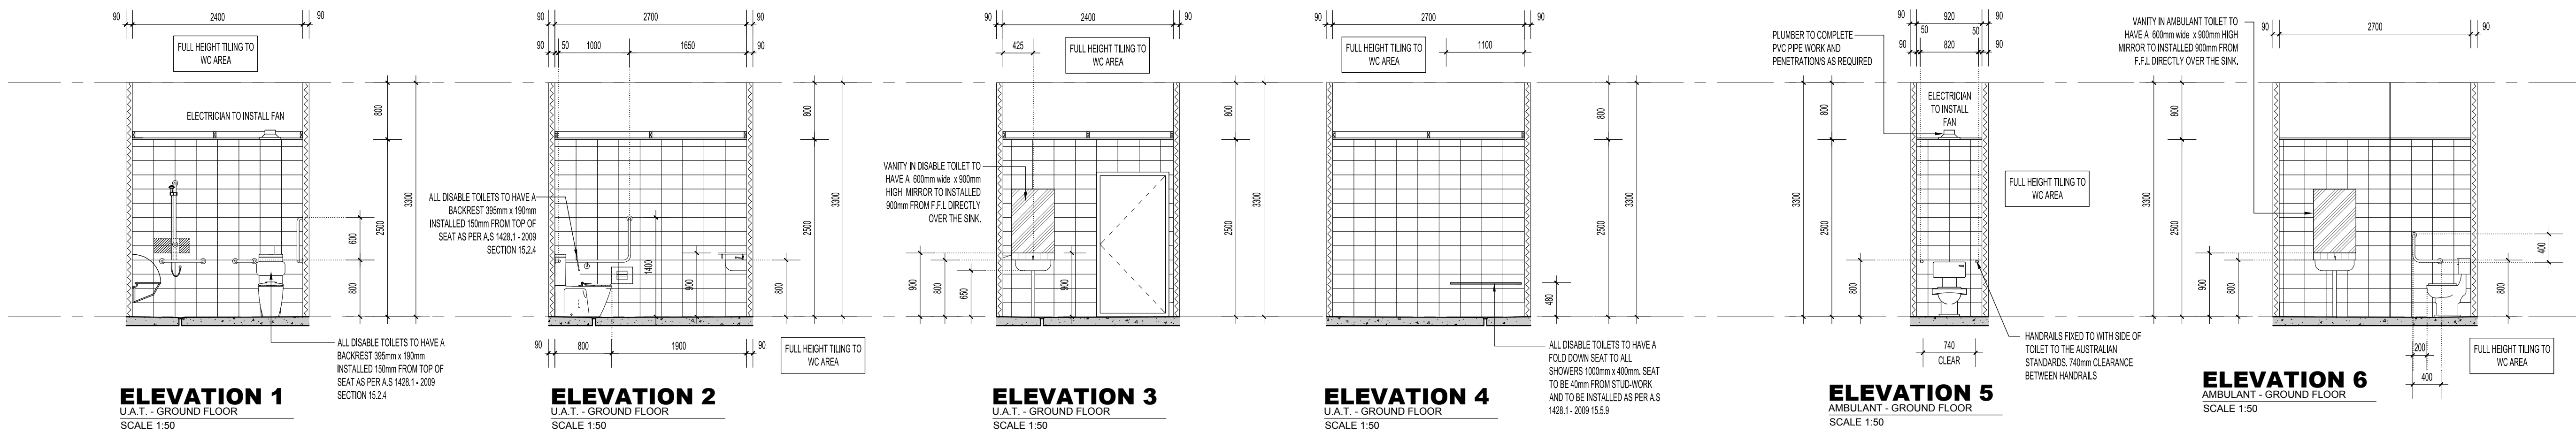

FLOOR PLAN
TOILET LAYOUT
SCALE 1:50

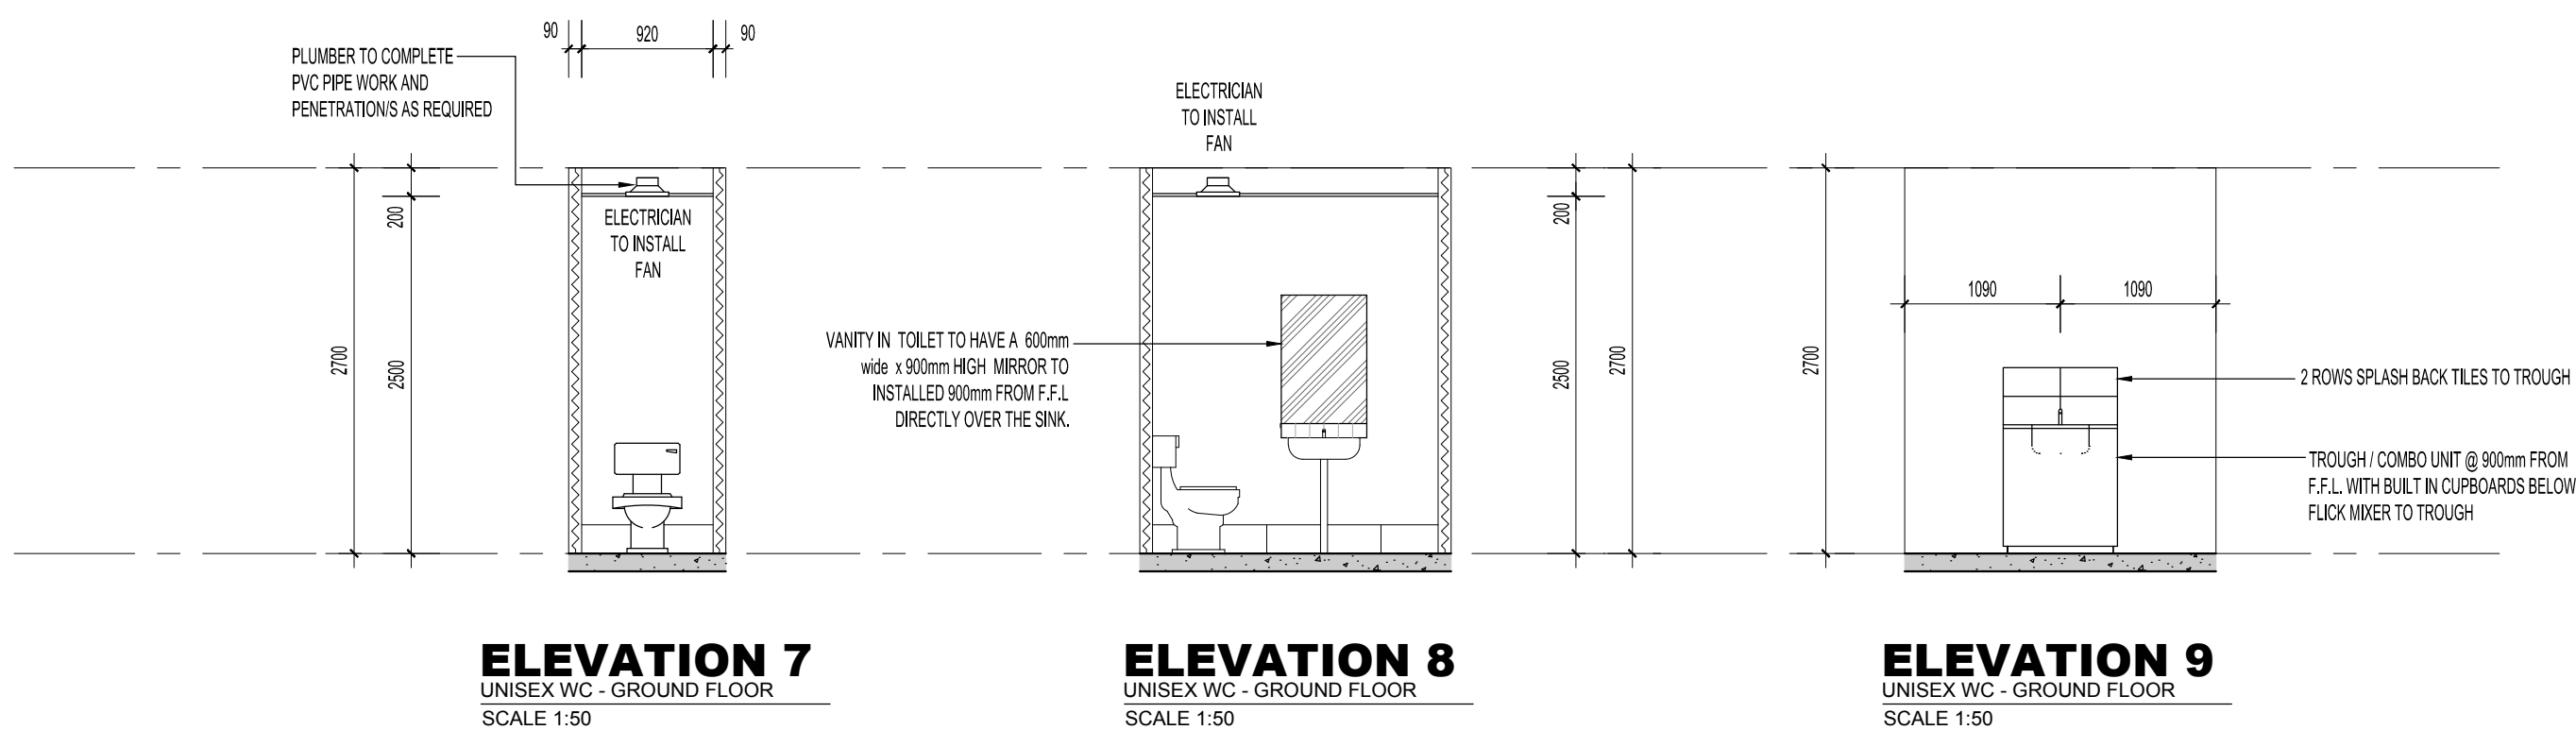

ELEVATION 9
UNISEX WC - GROUND FLOOR
SCALE 1:50

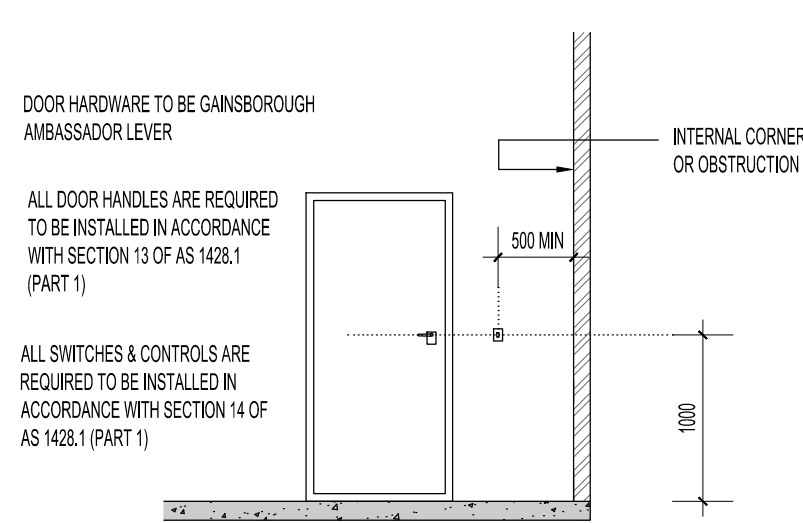

HEIGHTS FOR SWITCHES & DOOR HANDLES

SCALE 1:50

1	03/06/2020	J.M	FILTERED WATER PROVISIONS
0	31/10/2019	J.M	ISSUE FOR CONSTRUCTION
C	18/09/2019	J.M	CONTRACT CHANGES
B	01/08/2019	J.M	ISSUE FOR TENDER
A	16/07/2019	J.M	ISSUE FOR CDC APPROVAL
REV.	DATE	I.N.	DESCRIPTION

VESPOLI
CONSTRUCTIONS

OUR BUSINESS IS BUILDING YOURS

41 Cedric Street, STIRLING
Western Australia 6090
t. 08 9209 1800 e. admin@vespoli.com.au
f. 08 9209 1899 w. www.vespoli.com.au
ACN 113 413 077 ABN 65 545 929 538

© COPYRIGHT
THIS DESIGN AND / OR DRAWING IS CONFIDENTIAL
AND SHALL REMAIN THE PROPERTY OF VESPOLI
CONSTRUCTIONS. IT MUST NOT BE REPRODUCED
COPIED OR ALTERED WITHOUT THE EXPRESSED
APPROVAL OF VESPOLI CONSTRUCTIONS.

CONTRACTORS SHALL CHECK ALL DIMENSIONS AND CONDITIONS ON SITE PRIOR TO COMMENCING FABRICATION OR CONSTRUCTION. ANY DISCREPANCIES TO BE BROUGHT TO THE SUPERVISORS ATTENTION.

DO NOT SCALE FROM DRAWINGS.

THE DESIGNER RESERVES THE RIGHT TO ALTER DIMENSIONS ON SITE TO SUIT CONSTRUCTION, ENGINEERING OR SITE CONDITIONS

UNLESS OTHERWISE NOTED, RETAINING WALLS, DEMOLITION, SEWER PILING, SUBSOIL DRAINS, BLASTING OR OTHER SITE WORKS ARE ALL AT OWNERS EXPENSE

PROPOSED OFFICE AND
WAREHOUSE
PROJECT

LOT 50 FREIGHT RD
(ROE HIGHWAY LOGISTICS PARK)

DRAWING TITLE:
AMENITIES LAYOUTS &
ELEVATIONS /
SECTIONS

DRAWING No. **A400**
JOB No. **A19006**

drawn date PAGE No.
MWS 12/07/19
checked scale
JL AS SHOWN REV No. 1

ISSUED FOR CONSTRUCTION