
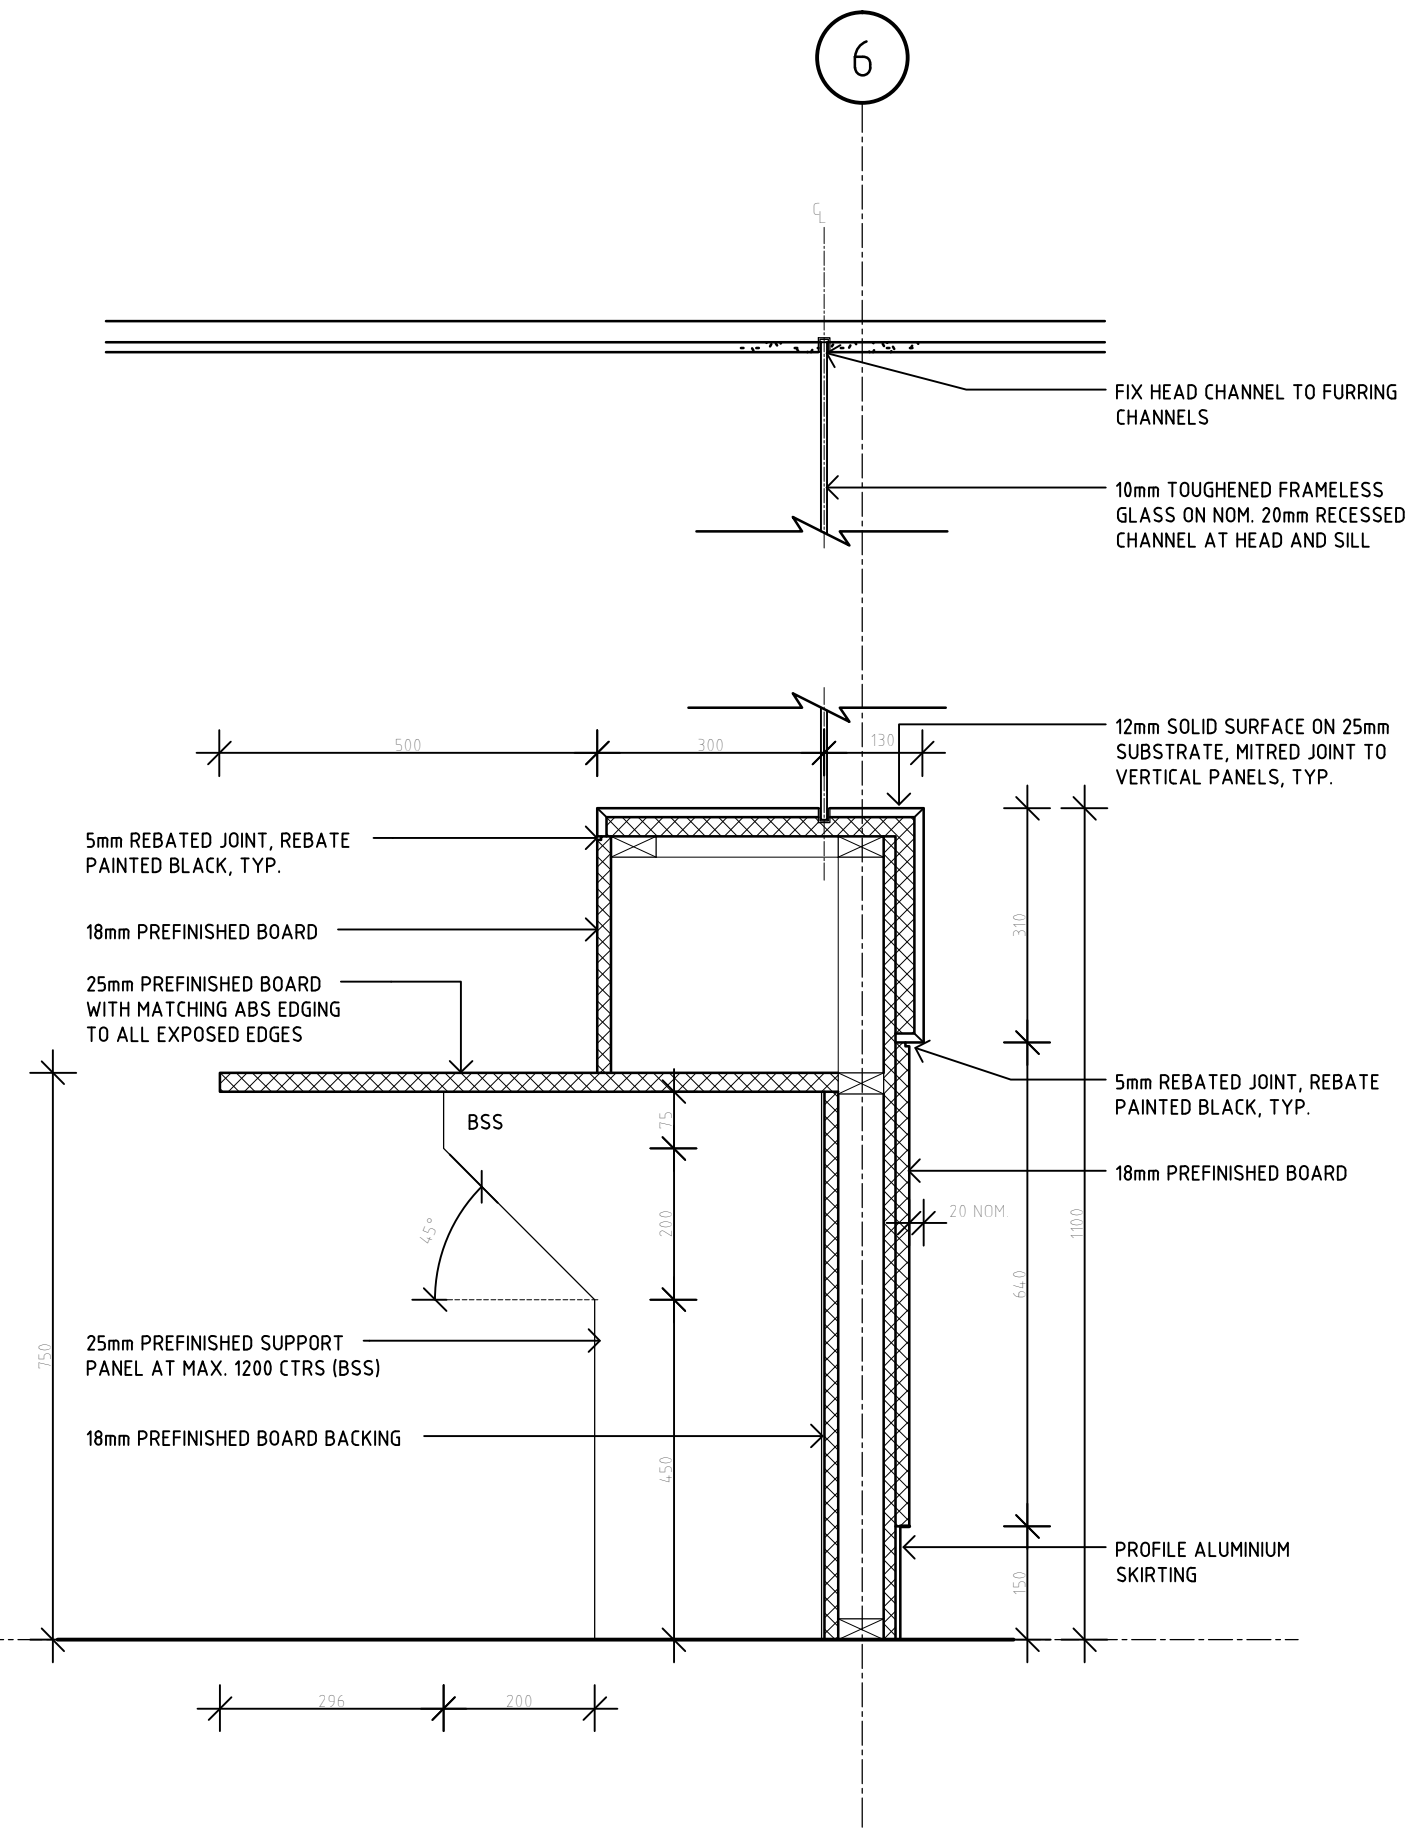


NOTATION GENERALLY AS SHOWN ON SECTION DETAIL 1

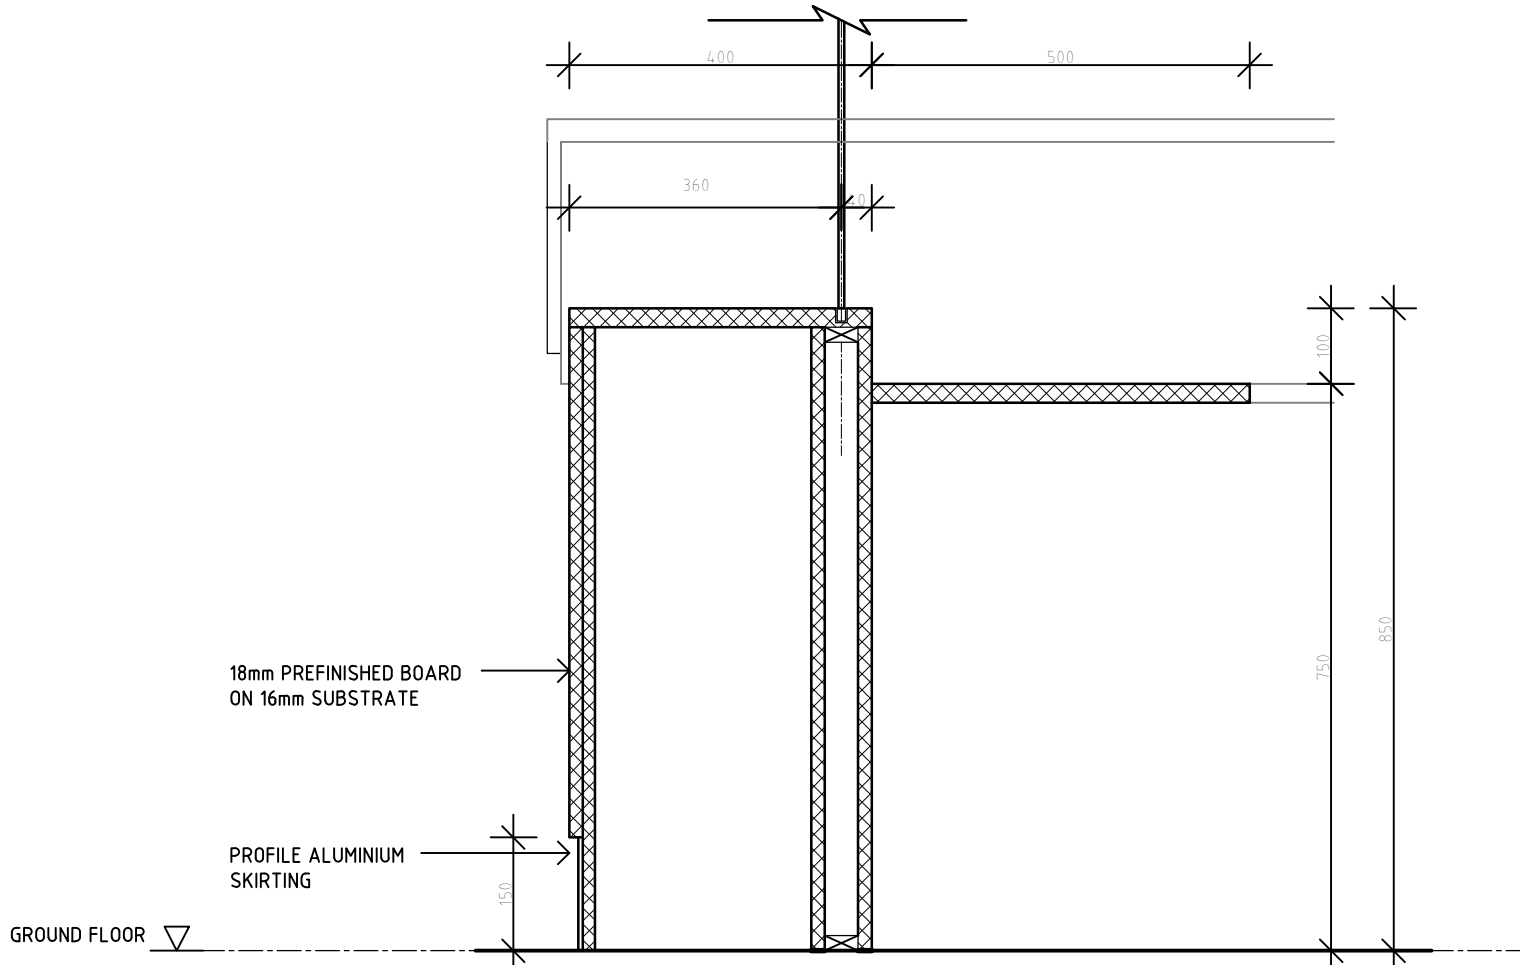

SECTION DETAIL

1
A44

SCALE 1:10

SECTION DETAIL


2
A44

SCALE 1:10

SECTION DETAIL

3
A44


SCALE 1:10

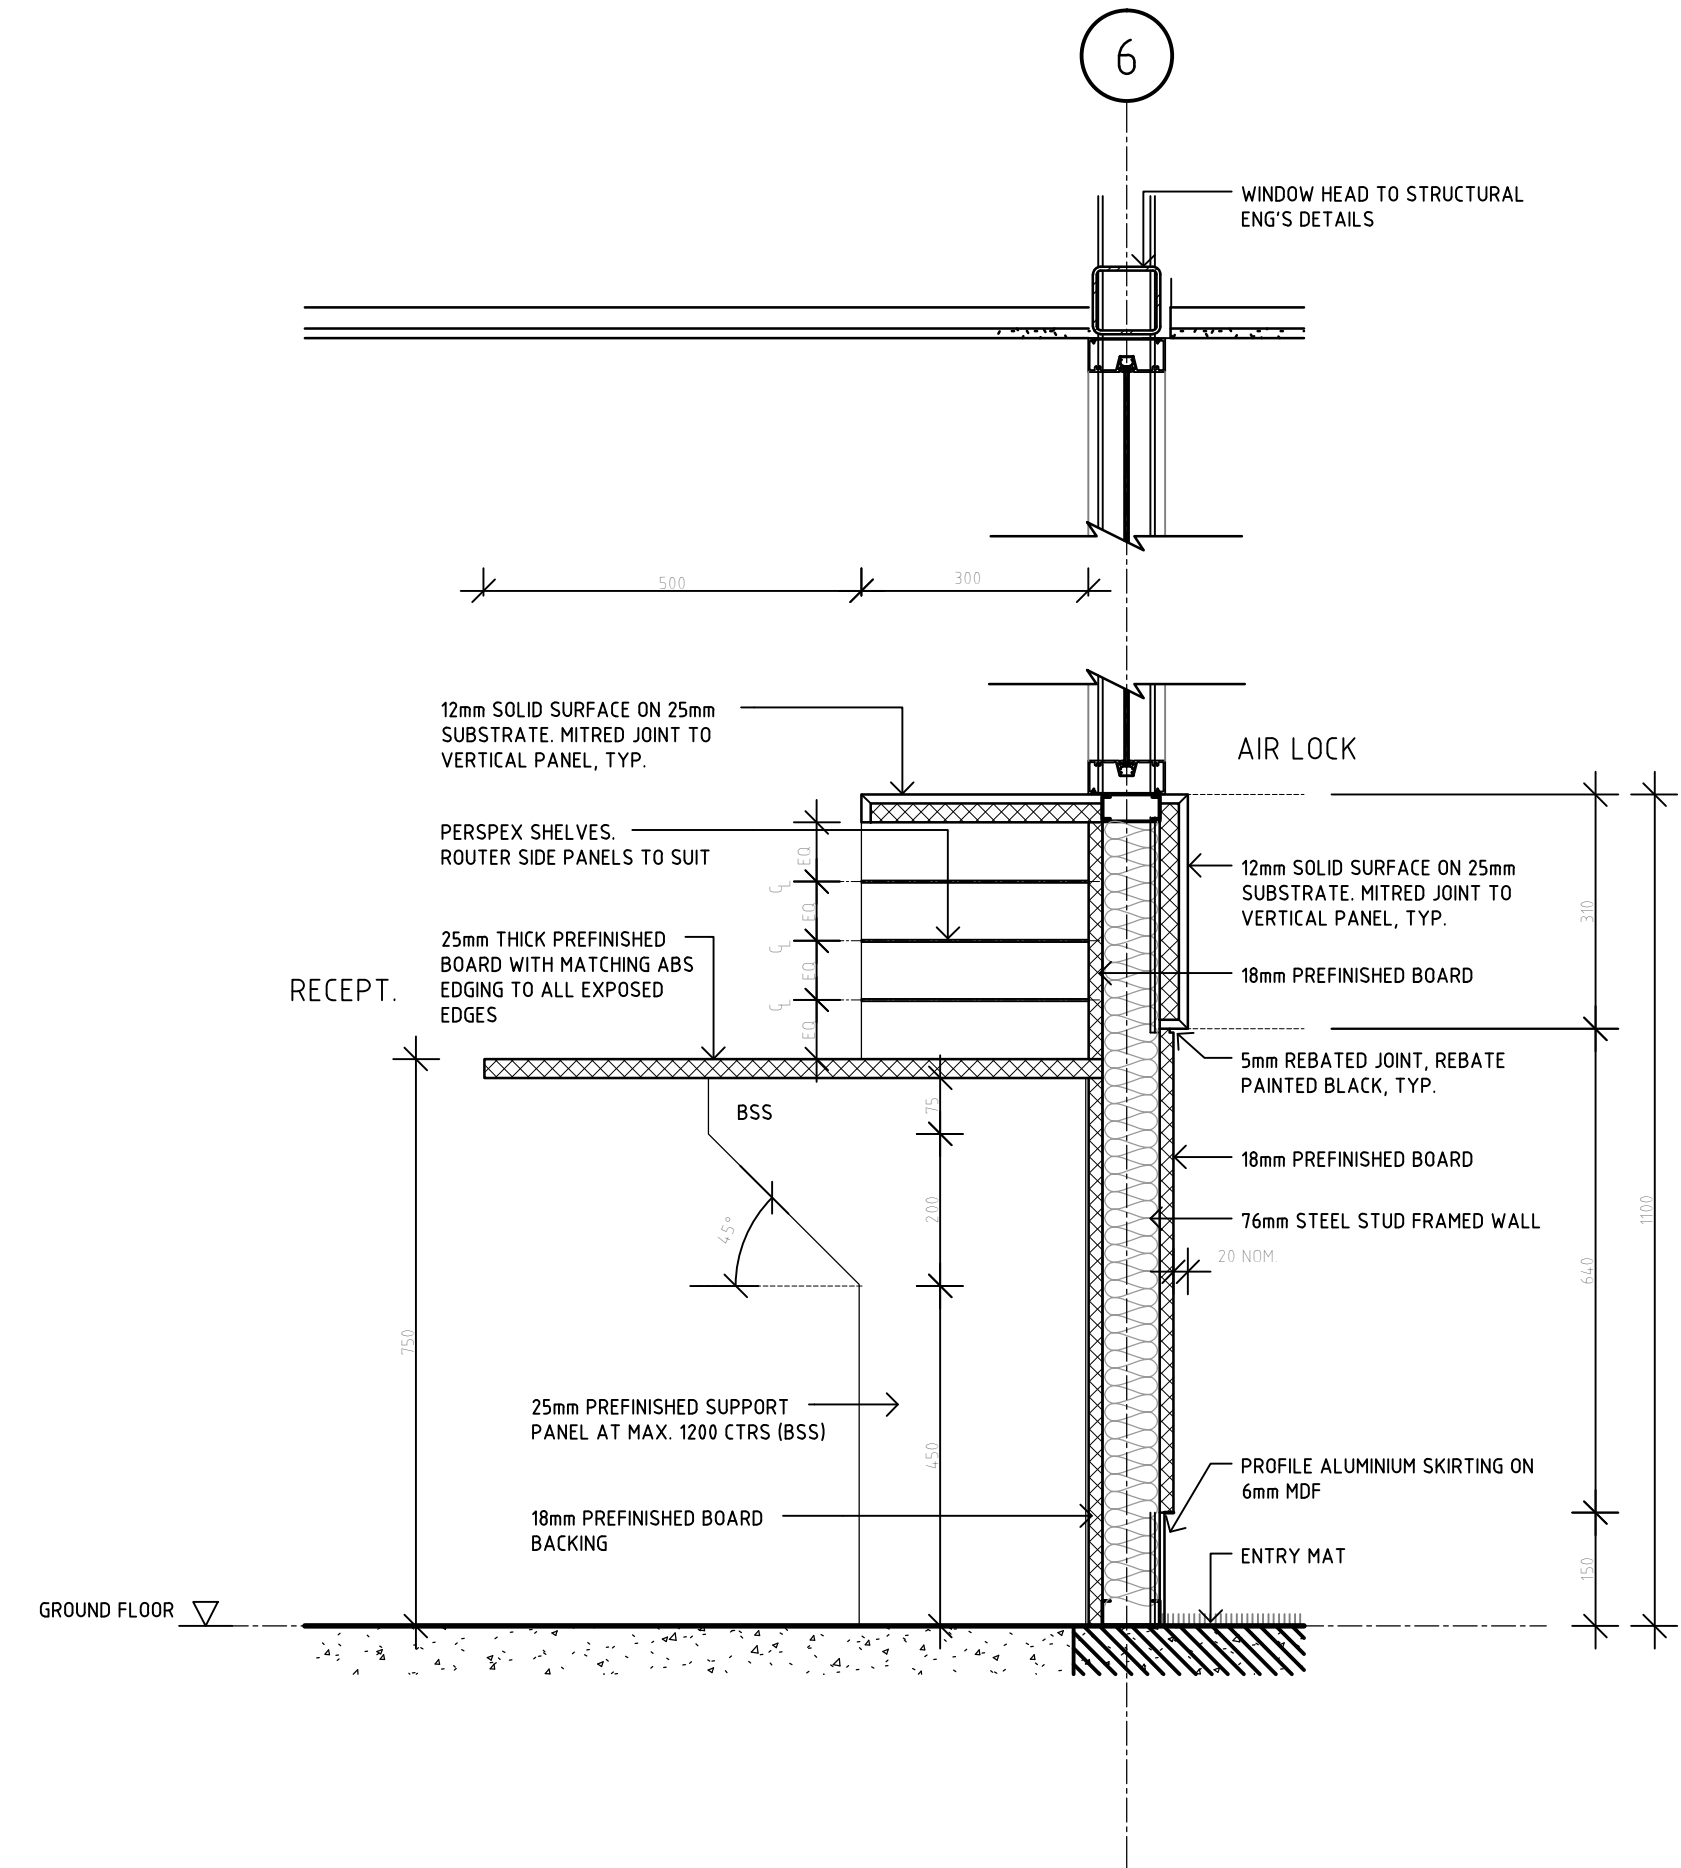

SECTION DETAIL

4
A44


SCALE 1:10

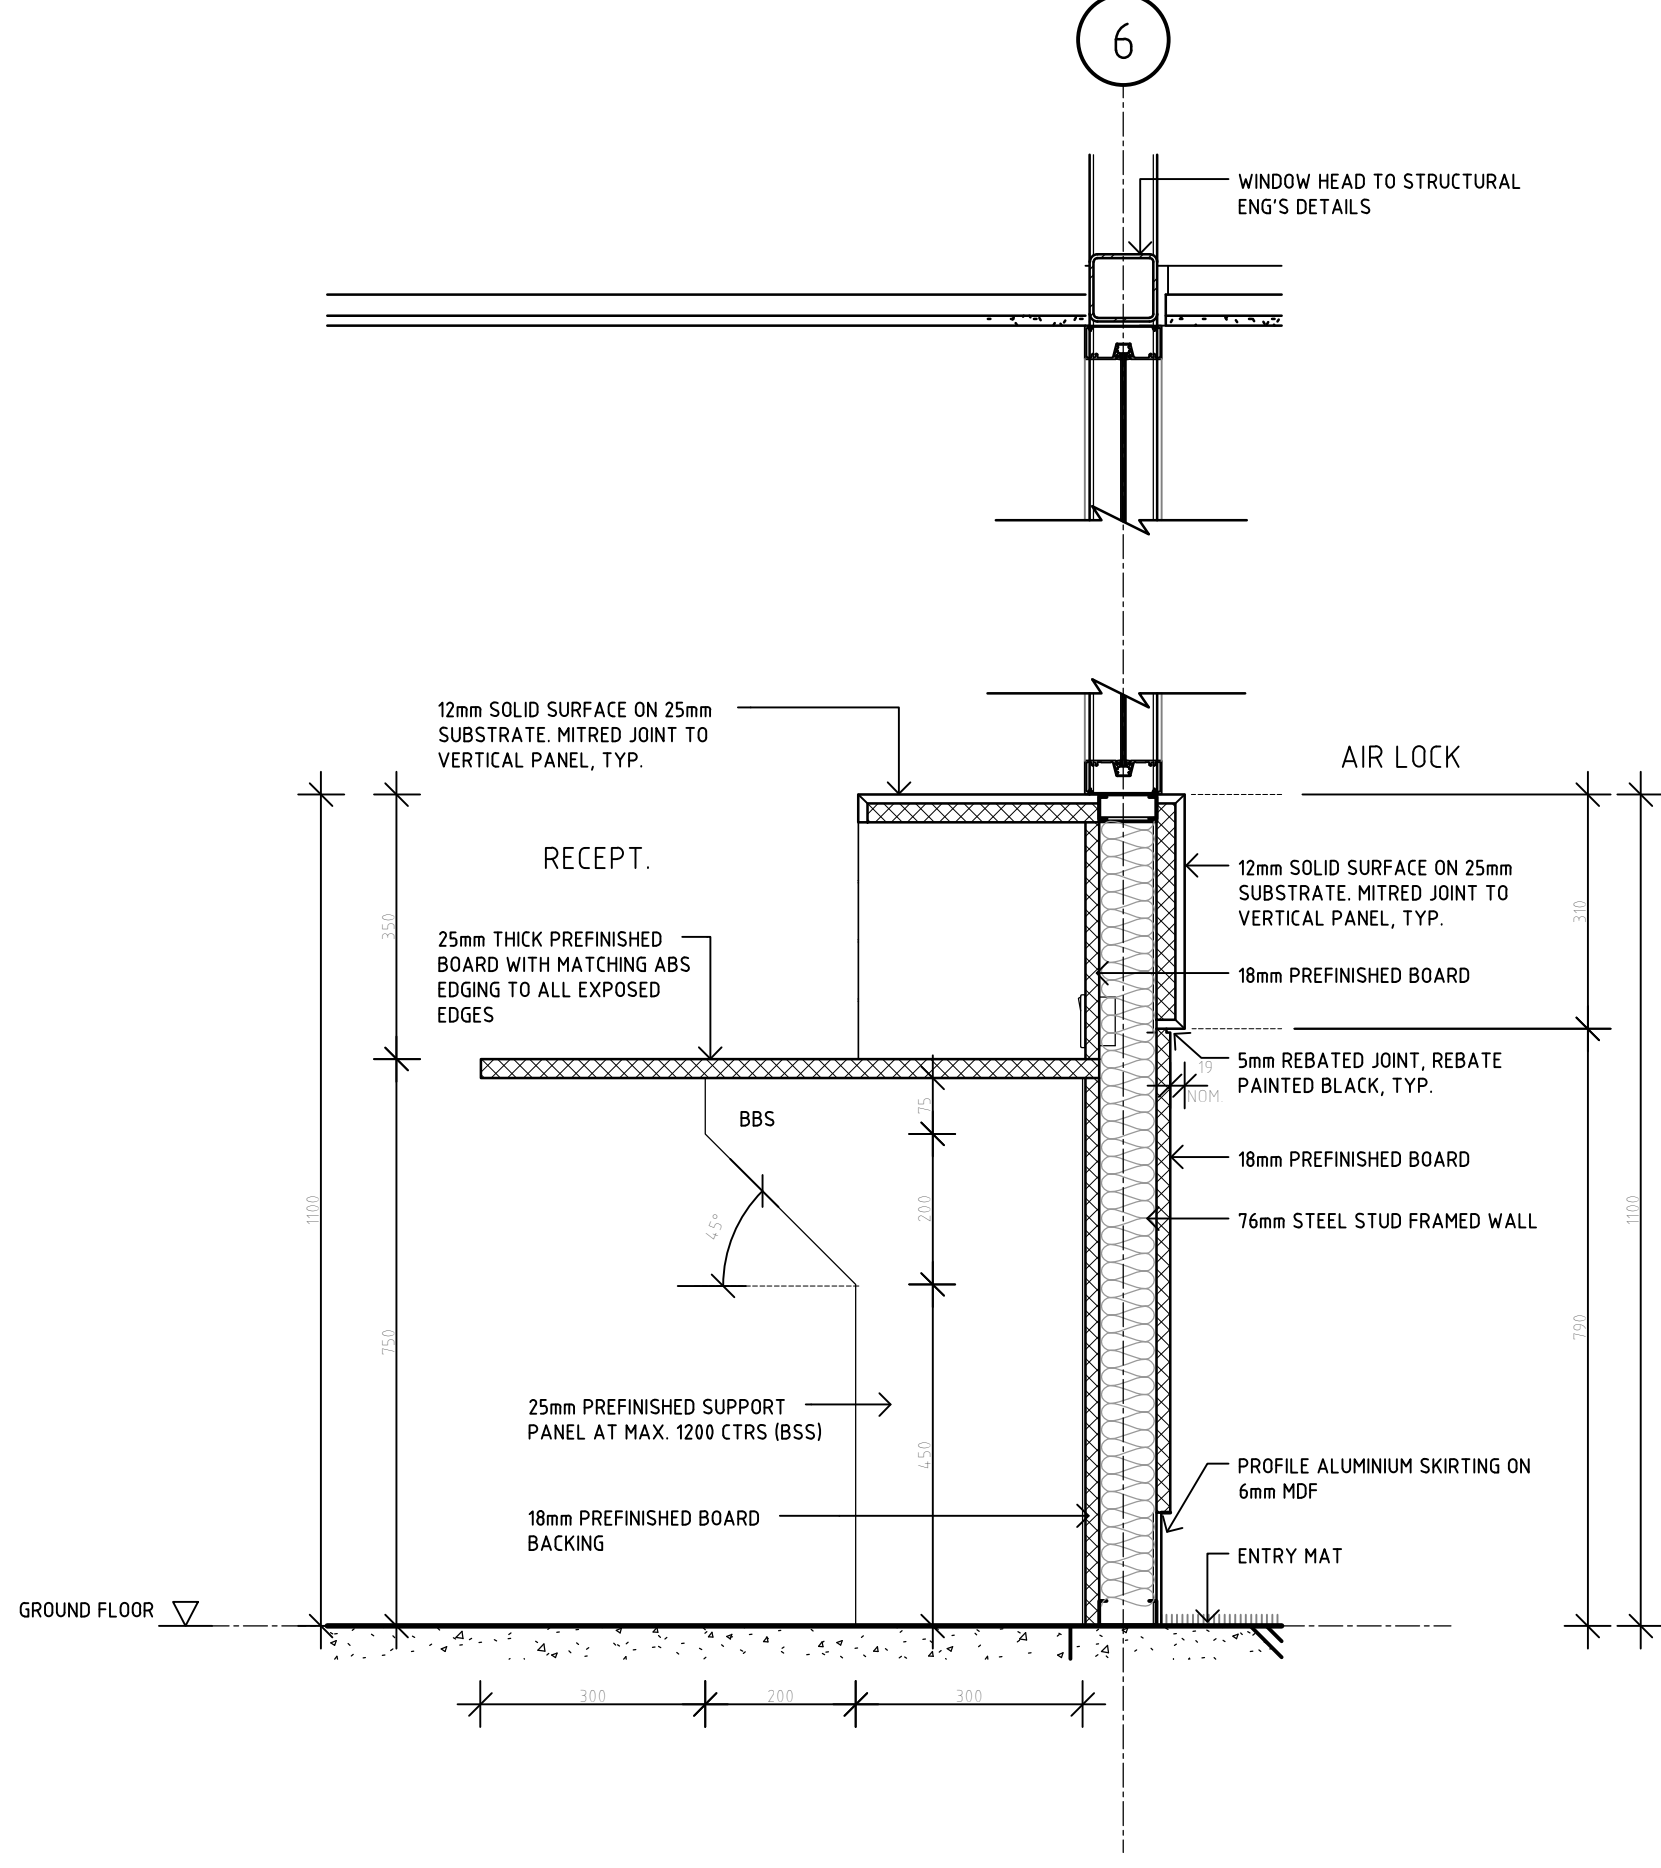

SECTION DETAIL

5
A44


SCALE 1:10

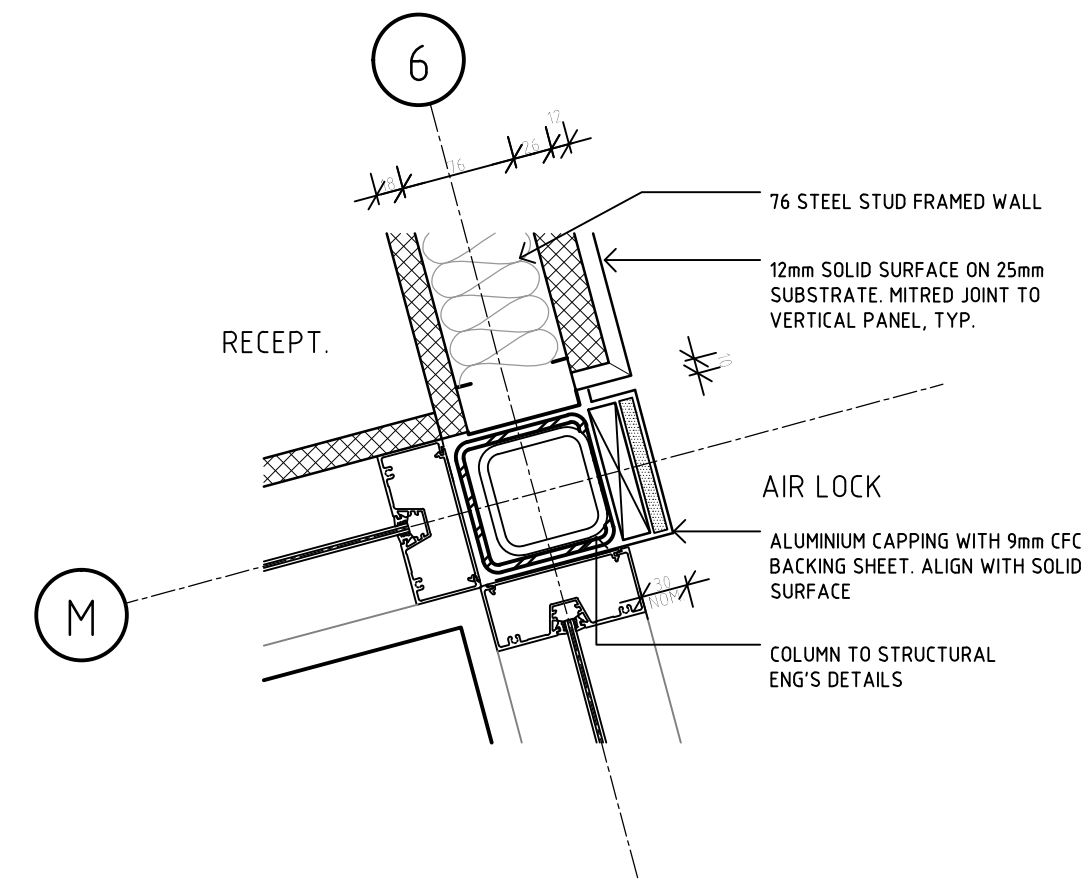

PLAN DETAIL

6
A44

SCALE 1:5

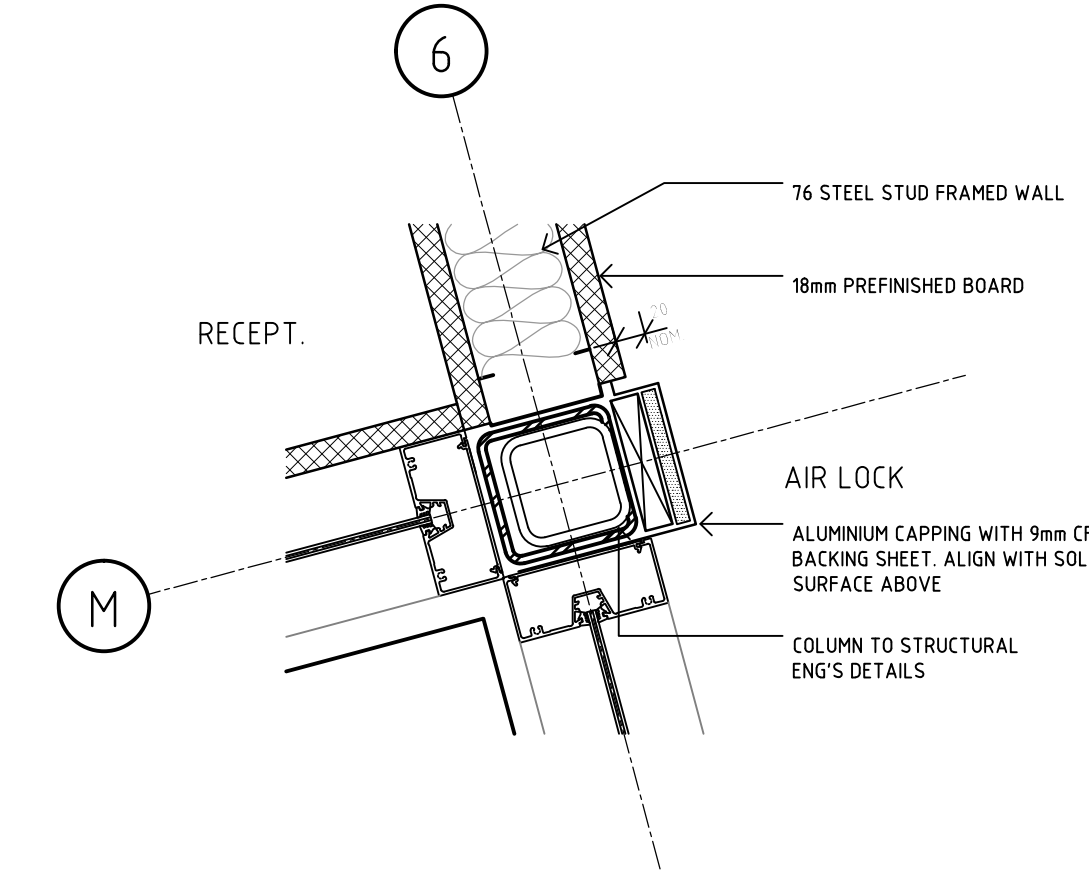

PLAN DETAIL

7
A44

SCALE 1:5

CABINETWORK NOTES

- ALL CABINETWORK TO BE CONSTRUCTED OF E0/E1 SUBSTRATE
- CONSTRUCT CABINETWORK AS DETAILED ON DRAWINGS. DASHED LINE DENOTES STRUCTURE BEHIND. DASH-DOT LINE DENOTES OVERHEAD STRUCTURE OR EXTENT OF PANEL OR MATERIAL FINISH.
- INSTALL BLOCKING OR BACKING AS REQUIRED FOR ATTACHMENT OF WALL MOUNTED CABINETWORK, FITTINGS OR ACCESSORIES PRIOR TO APPLICATION OF PLASTERBOARD.
- TO BE READ IN CONJUNCTION WITH FINISHES AND FURNITURE, FIXTURES & EQUIPMENT SCHEDULES.
- CHECK ALL DIMENSIONS ON SITE PRIOR TO CONSTRUCTION.
- INTERNAL CARCASESES TO BE CONSTRUCTED FROM 18mm PREFINISHED BOARD UNLESS OTHERWISE NOTED. EDGES TO BE FINISHED WITH MATCHING EDGING OR AS DETAILED.
- CUPBOARD DOORS/DRAWERS TO BE CONSTRUCTED FROM 18mm MDF OR SUBSTRATE AS SPECIFIED WITH MATCHING ABS EDGING FOR LAMINATES OR 2mm THICK MATCHING TIMBER EDGING FOR VENEERS.
- ALL SHELVING TO BE THE FOLLOWING THICKNESSES.

SPAN	THICKNESS
0-750MM	18MM
750-900MM	25MM
900-1200MM	35MM
- WHERE ADJUSTABLE SHELVING IS SPECIFIED IT SHALL BE SUPPORTED ON BRASS PINS INSERTED INTO BRASS FERRULES AT 50mm CENTRES.
- PROVIDE CLEAR RUBBER DOOR BUMPERS TO ALL CARCASESES AT DOOR/DRAWER JUNCTIONS.
- ALL HINGES TO BE FULLY OVERLAY 175 DEGREE OPENINGS. HINGES TO BE SELF-CLOSING OVER LAST 30 DEGREES OF SWING. ALL DRAWER RUNNERS TO BE SOFT CLOSING. IF APPLICABLE WITH HEIGHT AS DIMENSIONED.
- ALL POWER AND DATA OUTLETS TO BE COORDINATED WITH CONSULTANT DRAWINGS.
- TYPICALLY 20mm SCRIBE PIECE TO ALL VERTICAL EDGES ADJACENT TO WALL OR HORIZONTAL EDGES TO THE UNDERSIDE OF BULKHEADS AND ALL HORIZONTAL EDGES ADJACENT TO CEILING UNLESS OTHERWISE NOTED.
- ALL UNLAMINATED SUBSTRATES TO BE SEALED INCLUDING VENTILATION SLOT CUT OUTS.
- ALL FIXINGS TO BE CONCEALED.
- FOR WET AREA CARCASESES TO BE MADE FROM MOISTURE RESISTANT BOARD.
- DIMENSIONS AND MANUFACTURERS INSTALLATION GUIDES TO BE CHECKED FOR ALL SCHEDULED APPLIANCES AND FIXTURES.
- KICK BOARDS SHALL BE CONTINUOUS.
- LAMINATE SIDES OF CARCASES WHERE EXPOSED.
- REFER ALL DISCREPANCIES TO THE SUPERINTENDENT

ISSUED FOR CONSTRUCTION

0	10.01.18	ISSUED FOR CONSTRUCTION
	16.12.16	ISSUED FOR TENDER
REV	DATE	DESCRIPTION

DOCUMENTATION BY:

SPH ARCHITECTURE + INTERIORS
14/3 CAMBRIDGE STREET, WEST LEEDERVILLE
WA 6007 T: 08 9284 1888



MUKINBUDIN
HEALTH CENTRE
RECEPTION JOINERY DETAILS

DRAWN	SPH	DESIGNED	IS	REDUCTION
CHECKED	IS	PRINCIPAL		
APPROVED	IS			
SCALE	SCALE AS SHOWN	DATE	DEC 2016	DRAWING No.
DF PROJ No.	201-12744	DF FILE No.	2016/01825	A46

THIS IS A CADD DRAWING
DO NOT AMEND MANUALLY