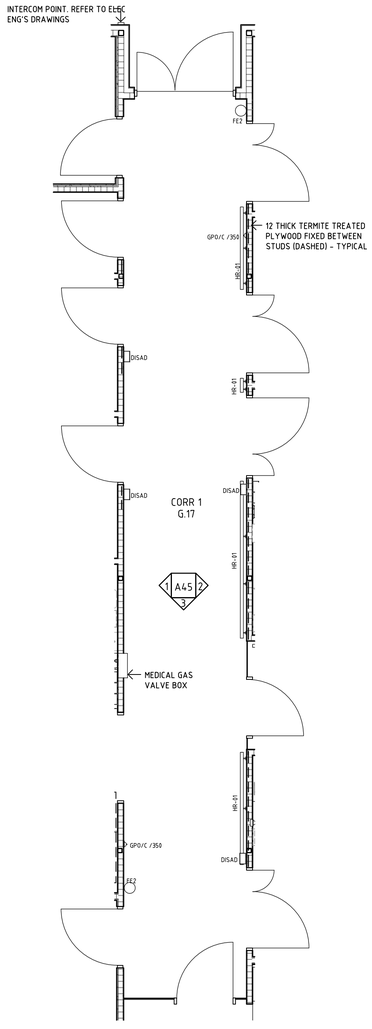

CORRIDOR 1 - PLAN
SCALE 1 : 50

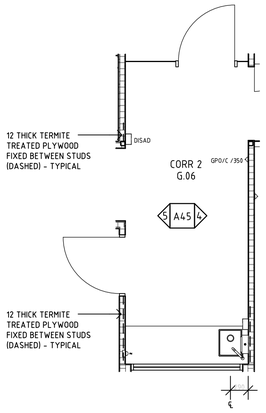

CORRIDOR 2 - PLAN
SCALE 1 : 50



CORRIDOR 3 - PLAN
SCALE 1 : 50



CORRIDOR 4 - PLAN
SCALE 1 : 50



MEDI GAS - PLAN
SCALE 1 : 50

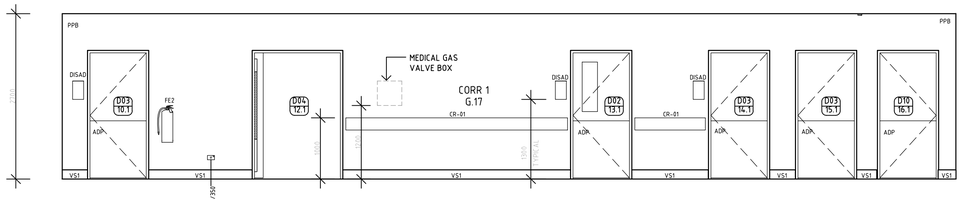

ELEVATION 1
SCALE 1 : 50

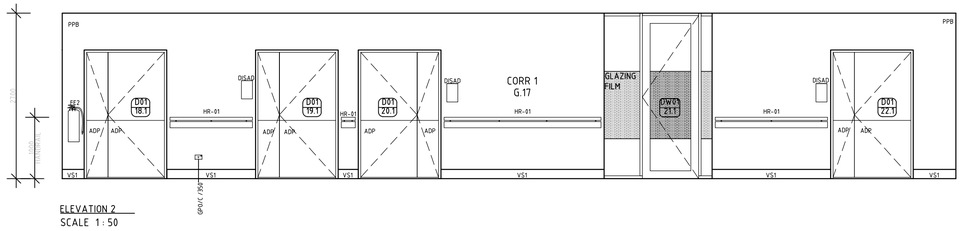

ELEVATION 2
SCALE 1 : 50



ELEVATION 3
SCALE 1 : 50



ELEVATION 4
SCALE 1 : 50

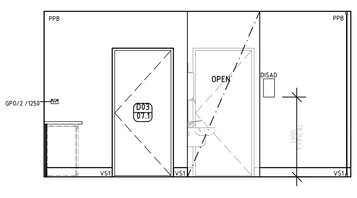

ELEVATION 5
SCALE 1 : 50

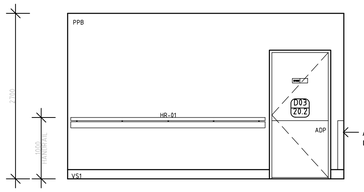

ELEVATION 6
SCALE 1 : 50



ELEVATION 7
SCALE 1 : 50



ELEVATION 8
SCALE 1 : 50



ELEVATION 9
SCALE 1 : 50



ELEVATION 10
SCALE 1 : 50

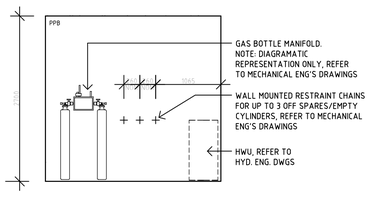

ELEVATION 11
SCALE 1 : 50

NORTH

GENERAL NOTES

DRAWINGS TO BE READ IN CONJUNCTION WITH THE MATERIALS & FINISHES SCHEDULE & FIXTURES & FITTINGS SCHEDULE

CLIENT TO ENGAGE LOCKSMITH FOR KEYING

PROVIDE FALLS IN THE FLOOR TO LEVELS AS SHOWN

FLOOR SHALL BE AS FOLLOWS: FALLS INSIDE SHOWER AREA SHALL HAVE A GRADIENT BETWEEN 1 in 60 & 1 in 80. FALLS OUTSIDE SHOWER AREA SHALL HAVE A GRADIENT BETWEEN 1 in 80 & 1 in 100

ALL DIMENSIONS ARE FROM FINISHES APPLIED TO WALLS OR FLOORS
- DIMENSIONS SHOWN AS APPROX. ARE THE INTENDED DIMENSIONS BUT MAY VARY

APPLY WATER PROOFING TO THE FULL EXTENT OF THE WC/SHR FLOOR & TO THE WALLS OF THE SHOWER (FULL HEIGHT). PROVIDE A WATERPROOF FLASHING BETWEEN THE FLOOR & THE WALLS FOR THE FULL EXTENT OF THE ROOM - ALSO REFER TO WET AREA SETDOWN DETAIL

FIX 12 THICK TERMITE TREATED PLYWOOD FIXED BETWEEN STUDS FOR THE FIXING OF FIXTURES & FITTINGS. FIXING TO WALL LININGS WILL NOT BE ACCEPTED

WHERE PRODUCT NAMES ARE IDENTIFIED; A SIMILAR PRODUCT EQUIVALENT IN FUNCTION, QUALITY, ETC TO THE APPROVAL OF THE SUPERINTENDENT WILL BE CONSIDERED

CONFIRM ALL DIMENSIONS ON SITE PRIOR TO THE MANUFACTURE OF COMPONENTS

REFER TO SCHEDULE IN SPECIFICATION DESCRIBING GROUP 1 AND GROUP 2 ITEMS (TYPICALLY GROUP 1: BUILDER TO PROVIDE AND INSTALL. GROUP 2: CLIENT TO PROVIDE AND BUILDER TO INSTALL. GROUP 3: NOT IN CONTRACT)

GRAB RAILS
GRAB RAILS SHALL COMPLY WITH AS. 1428.1 & SHALL BE 32 OD x 1.6mm POLISHED STAINLESS STEEL TUBE WITH 75 DIA x 3mm THICK STAINLESS STEEL FLANGE FIXED TO WALL WITH APPROVED STAINLESS STEEL FIXINGS.

GRAB RAIL CLEARANCE TO WALLS SHALL BE 50mm.

THE CONTRACTOR SHALL OBTAIN APPROVAL FROM THE SUPERINTENDENT OF THE PROPOSED FIXINGS FOR THE GRAB RAILS BEFORE INSTALLATION.

ALSO REFER TO THE FIXTURES & FITTINGS SCHEDULE FOR GRAB RAIL TYPES.

LEGEND:

ADJ	ADJUSTABLE
BBD-_	BLACKBOARD-TYPE
BCT-_	BABY CHANGE TABLE-TYPE
BEN-_	BENCH-TYPE
BH-_	BEDHEAD-TYPE
BHK_	BULKHEAD TYPE
BPD	BODY PROTECTED SIGN
CCTV-_	CCTV MONITOR-TYPE
CG	CORNER GUARD - ACROVYN
CHK/_	CLOTHES HOOK/HEIGHT AFL
CLK-_	CLOCK-TYPE
COMP-_	COMPUTER-TYPE
COS	CHECK ON SITE
CR-_	CRASH RAIL-TYPE
CT	CURTAIN TRACK
DC-_	DURESS CALL/HEIGHT AFL
DISAD	DISPENSER - ALCOHOLIC HAND GEL
DISEB	DISPENSER - EMESIS BAG
DISGD	DISPENSER - DISPOSABLE GLOVE
DISMD	DISPENSER - MOISTURISER
DISPD	DISPENSER - PAPER TOWEL
DISSD	DISPENSER - SOAP
EC/_	EMERGENCY CALLS/HEIGHT AFL
ELC	PROCEDURE LIGHT - CEILING MOUNTED
ELW	EXAMINATION LIGHT - WALL MOUNTED
ETS-_	CCTV SECURITY CAMERA-TYPE
FBB-_	FEEDBACK BOX-TYPE
FHU-_	FULL HEIGHT UNIT-TYPE
FR	FRIDGE
GPO/1/_	GENERAL POWER OUTLET SINGLE/HEIGHT AFL
GPO/2/_	GENERAL POWER OUTLET DOUBLE/HEIGHT AFL
GPO/C/_	GENERAL POWER OUTLET CLEANERS/HEIGHT AFL
GPO/E/_	GENERAL POWER OUTLET EQUIPMENT/HEIGHT AFL
HD-_	HAND DRYER-TYPE
HOE-_	EQUIPMENT HOOK-TYPE
HOO-_	CATHETER HOOK-TYPE
HOR-_	HOOK RACK (BROOM/MOP)-TYPE
HWU	HOT WATER UNIT
HR-_	HAND RAIL/CRASH RAIL-TYPE

LS/_	LIGHT SWITCH/HEIGHT AFL
MRAC-_	MAGAZINE RACK-TYPE
MXA-_	MAXI LOUVRED PANEL-TYPE
NC/_	NURSE CALL WALL MOUNTED/HEIGHT AFL
NCP/_	NURSE CALL PENDANT/HEIGHT AFL
NCW/_	NURSE CALL WATERPROOF WALL MOUNTED/HEIGHT AFL
NIC	NOT IN CONTRACT
NOB	NOTICE BOARD
OBC-_	OVERBENCH CUPBOARD-TYPE
OBS-_	OVERBENCH SHELVING-TYPE
PBD-_	PINBOARD-TYPE
PRA-_	PAMPHLET RACK-TYPE
SB-_	SANITARY BASIN SET TYPE (A, B & etc)
SDA-_	SANITARY DISABLED WC SET-TYPE
SINK-_	SINK-TYPE
SIP-_ST	SANITARY STANDARD WC SET-TYPE
SSHDA-_	SANITARY DISABLED SHOWER SET-TYPE
SSG	STAINLESS STEEL FLOOR GRATE
S-BEN-_	STAINLESS STEEL BENCH-TYPE
SS-SHF-_	STAINLESS STEEL SHELF-TYPE
STA/-_	STAFF ASSIST CALL/HEIGHT AFL
STB-_	STORAGE UNIT-TYPE
TELE-_	TELEVISION-TYPE
TPH-_	TELEPHONE-TYPE
TRH	TOILET ROLL HOLDER
UBC-_	UNDERBENCH CUPBOARD-TYPE
UBS-_	UNDERBENCH SHELVING-TYPE
VCO/2/_	VIDEO CONFERENCING OUTLET/ DOUBLE/HEIGHT AFL
VDO/2/_	DATA OUTLET/DOUBLE/HEIGHT AFL
WBD-_	WHITEBOARD-TYPE
WRT-_	WRITE UP DESK-TYPE
XRAY-_	XRAY VIEWER-TYPE

NOTE: THE CODES _L & _R APPENDED TO ANOTHER CODE INDICATE A LEFT OR RIGHT VERSION

FINISHES (TO BE READ IN CONJUNCTION WITH FINISHES SCHEDULE)

ADP	ACROVYN DOOR PROTECTION-REBATED FLUSH INTO DOOR
CST	CERAMIC SHEET TILE
CVS	COVED VINYL SKIRTING
WV	WALL VINYL
PPB	PAINTED PLASTERBOARD
VS1	VINYL SKIRTING TYPE 1
ST1	STONE VENEER WALL CLADDING

ISSUED FOR CONSTRUCTION

REV	DATE	DESCRIPTION
0	10.01.18	ISSUED FOR CONSTRUCTION
	16.12.16	ISSUED FOR TENDER

DOCUMENTATION BY:

SPH ARCHITECTURE + INTERIORS
143 CAMBRIDGE STREET, WEST LEEDERVILLE
WA 6007 T: 08 9284 1888

Government of **Western Australia**
Department of Finance
Building Management and Works

MUKINBUDIN
HEALTH CENTRE
ROOM LAYOUTS - SHEET 6

DRAWN	SPH	DESIGNED	IS	REDUCTION
CHECKED	IS	PRINCIPAL		0
APPROVED	IS			
SCALE 1:50 AT A1		DATE DEC 2016		DRAWING No. A45 0
DF PROJ No. 201-12744		DF FILE No. 2016/01825		

THIS IS A CADD DRAWING
DO NOT AMEND MANUALLY